

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表1 PN0.6MPa (6压力) 板式平焊钢制管法兰 mm

公称 通径 DN	管子外径 A1		连接尺寸					密封面尺寸		法兰 厚度 C	法兰内径 B1		坡口 宽度 b	法兰理论 重量系列 Z kg
			法兰外径 系列1/系列2 D	螺栓孔 中心圆 直径K	螺栓孔直径 系列1/系列2 L	螺栓、螺柱					A	B		
	国际 A管	国内 B管				数量n	螺纹Th. 系列1/系列2	d	f					
10	17.2	14	75	50	12	4	M10	32	2	12	18	15	3	0.32
15	21.3	18	80	55	12	4	M10	40	2	12	22	19	3	0.34
20	26.9	25	90	65	12	4	M10	50	2	14	27.5	26	3	0.54
25	33.7	32	100	75	12	4	M10	60	2	14	34.5	33	4	0.64
32	42.4	38	120	90	14	4	M12	70	2	16	43.5	39	4	1.10
40	48.3	45	130	100	14	4	M12	80	3	16	49.5	46	4	1.22
50	60.3	57	140	110	14	4	M12	90	3	16	61.5	59	4	1.35
65	76.1	76	160	130	14	4	M12	110	3	16	77.5	78	5	1.67
80	88.9	89	190/185	150	18	4	M16	125	3	18	90.5	91	5	2.48
100	114.3	108	210/205	170	18	4	M16	145	3	18	116	110	5	2.89
125	139.7	133	240/235	200	18	8	M16	175	3	20	141.5	135	5	3.94
150	168.3	159	265/260	225	18	8	M16	200	3	20	170.5	161	5	4.47
175		194	290	255	18	8	M16	230	3	22		196	6	5.54
200	219.1	219	320/315	280	18	8	M16	255	3	22	221.5	222	7	6.07
225		245	340	305	18	8	M16	280	3	22		248	8	6.60
250	273	273	375/370	335	18	12	M16	310	3	24	276.5	276	9	8.03
300	323.9	325	440/435	395	23	12	M20	362	4	24	327.5	328	9	10.30
350	355.6	377	490/485	445	23	12	M20	415	4	26	359.5	380	10	12.59
400	406.4	426	540/535	495	23	16	M20	462	4	28	411	430	10	15.20
450	457	480	595/590	550	23	16	M20	518	4	28	462	484	10	17.59
500	508	530	645/640	600	23	20/16	M20	568	4	30	513.5	534	10	20.67注意
600	610	630	755	705	26/25	20	M24/M22	670	5	30	616.5	634	10	26.57
700	711	720	860	810	26/25	24	M24/M22	755	5	32	715	724	10	37.10
800	813	820	975	920	30	24	M27	880	5	32	817	824	10	46.20
900	914	920	1075	1020	30	24	M27	980	5	34	918	924	10	55.10
1000	1016	1020	1175	1120	30	28	M27	1080	5	36	1020	1024	10	64.36
1200	1219	1220	1405/1400	1340	34	32	M30	1295	5	30	1223	1224	12	73参考
1300		1320	1520	1450	34	32	M30	1405	5	30		1324	12	80参考
1400	1422	1420	1630/1620	1560	36/34	36	M33/M30	1510	5	34	1426	1424	14	105参考
1500		1520	1720	1660	34	36	M30	1610	5	34		1524	14	115参考
1600	1626	1620	1830/1820	1760	36/34	40	M33/M30	1710	5	36	1630	1624	16	125参考
1750			1995	1920	41	44	M36	1860	5	36			16	155参考
1800	1829	1820	2045	1970	41	44	M36	1910	5	38	1833	1824	17	170参考
2000	2032	2020	2265	2180	42/48	48	M39/M42	2110	5	38	2036	2024	19	210参考
2200			2475	2390	48	52	M42	2330	6	40			20	240参考
2400			2685	2600	48	56	M42	2540	6	42			22	300参考

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表2 PN1.0MPa (10压力) 板式平焊钢制管法兰 mm

公称 口径 DN	管子外径 A1		连接尺寸					密封面尺寸		法兰 厚度 C	法兰内径 B1		坡口 宽度 b	法兰理论 重量系列 Z kg
			法兰外径 系列1/系列2 D	螺栓孔 中心圆 直径K	螺栓孔直径 系列1/系列2 L	螺栓、螺柱					A	B		
	国际 A管	国内 B管				数量n	螺纹Th. 系列1/系列2	d	f					
10	17.2	14	90	60	14	4	M12	40	2	12	18	15	3	0.46
15	21.3	18	95	65	14	4	M12	45	2	12	22	19	3	0.51
20	26.9	25	105	75	14	4	M12	55	2	14	27.5	26	3	0.75
25	33.7	32	115	85	14	4	M12	65	2	14	34.5	33	4	0.89
32	42.4	38	140/135	100	18	4	M16	78	2	16	43.5	39	4	1.40
40	48.3	45	150/145	110	18	4	M16	85	3	18	49.5	46	4	1.71
50	60.3	57	165/160	125	18	4	M16	100	3	18	61.5	59	4	2.09
65	76.1	76	185/180	145	18	4	M16	120	3	20	77.5	78	5	2.84
80	88.9	89	200/195	160	18	3/4	M16	135	3	20	90.5	91	5	3.24注意
100	114.3	108	220/215	180	18	8	M16	155	3	22	116	110	5	4.01
125	139.7	133	250/245	210	18	8	M16	185	3	24	141.5	135	5	5.46
150	168.3	159	285/280	240	23	8	M20	210	3	24	170.5	161	5	6.67
175		194	310	270	23	8	M20	240	3	24		196	6	7.44
200	219.1	219	340/335	295	23	8	M20	265	3	24	221.5	222	7	8.24
225		245	365	325	23	8	M20	295	3	24		248	8	9.30
250	273	273	395/390	350	23	12	M20	320	3	26	276.5	276	9	10.7
300	323.9	325	445/440	400	23	12	M20	363	4	28	327.5	328	9	12.9
350	355.6	377	505/500	460	23	16	M20	423	4	28	359.5	380	10	15.9
400	406.4	426	565	515	26/25	16	M24/M22	482	4	30	411	430	10	21.8
450	457	480	615	565	26/25	20	M24/M22	532	4	30	462	484	10	24.4
500	508	530	670	320	26/25	20	M24/M22	585	4	32	513.5	534	10	27.7
600	610	630	780	725	30	20	M27	685	5	36	616.5	634	10	39.4
700	711	720	895	340	30	24	M27	800	5	36	715	724	10	53
800	813	820	1015/1010	950	34	24	M30	905	5	38	817	824	10	67
900	914	920	1115/1110	1050	34	28	M30	1005	5	38	918	924	10	76参考
1000	1016	1020	1230/1220	1160	36/34	28	M33/M30	1115	5	38	1020	1024	10	90参考
1200	1219	1220	1340	1270	36	28	M33	1222	5	40		1124	10	125参考
1300		1320	1455/1450	1380	39/41	32	M36	1325	5	44	1223	1224	12	143参考
1400	1422	1420	1575	1490	41	32	M36	1420	5	46		1324	12	180参考
1500		1520	1575	1590	42/48	36	M39/M42	1525	5	48	1426	1424	14	195参考
1600	1626	1620	1785	1700	48	36	M42	1640	5	50		1524	14	225参考
1750			1915	1820	48/54	40	M45/M48	1750	5	52	1630	1624	16	275参考
1800	1829	1820	2065	1970	54	44	M48	1900	5	54			16	310参考
2000	2032	2020	2115	2020	48/54	44	M45/M48	1950	5	56	1833	1824	17	340参考
2200			2325	2230	48/54	48	M45/M48	2160	5	60	2036	2024	18	420参考
2400			2550	2440	56	52	M52	2370	6	80			20	660参考

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表3 PN1.6MPa (16压力) 板式平焊钢制管法兰 mm

公称 通径 DN	管子外径 A1		连接尺寸					密封面尺寸		法兰 厚度 C	法兰内径 B1		坡口 宽度 b	法兰理论 重量系列 Z kg
			法兰外径 系列1/系列2 D	螺栓孔 中心圆 直径K	螺栓孔直径 系列1/系列2 L	螺栓、螺柱					A	B		
	国际 A管	国内 B管				数量n	螺纹Th. 系列1/系列2	d	f					
10	17.2	14	90	60	14	4	M12	40	2	14	18	15	3	0.55
15	21.3	18	95	65	14	4	M12	45	2	14	22	19	3	0.71
20	26.9	25	105	75	14	4	M12	55	2	16	27.5	26	3	0.87
25	33.7	32	115	85	14	4	M12	65	2	18	34.5	33	4	1.18
32	42.4	38	140/135	100	18	4	M16	78	2	18	43.5	39	4	1.60
40	48.3	45	150/145	110	18	4	M16	85	3	20	49.5	46	4	2.00
50	60.3	57	165/160	125	18	4	M16	100	3	22	61.5	59	4	2.61
65	76.1	76	185/180	145	18	4	M16	120	3	24	77.5	78	5	3.45
80	88.9	89	200/195	160	18	8	M16	135	3	24	90.5	91	5	3.71
100	114.3	108	220/215	180	18	8	M16	155	3	24	116	110	5	4.80
125	139.7	133	250/245	210	18	8	M16	185	3	28	141.5	135	5	6.47
150	168.3	159	285/280	240	23	8	M20	210	3	28	170.5	161	5	7.92
175		194	310	270	23	8	M20	240	3	28		196	6	8.81
200	219.1	219	340/335	295	23	12	M20	265	3	30	221.5	222	7	10.10
225		245	365	325	23	12	M20	295	3	30		248	8	11.20
250	273	273	405	355	26/25	12	M24/M22	320	3	32	276.5	276	9	15.70
300	323.9	325	460	410	26/25	12	M24/M22	375	4	32	327.5	328	9	18.10
350	355.6	377	520	470	26/25	16	M24/M22	436	4	34	359.5	380	10	23.30
400	406.4	426	580	525	30	16	M27	485	4	38	411	430	10	31.00
450	457	480	640	585	30	20	M27	515	4	42	462	484	10	40.20
500	508	530	715/705	650	34	20	M30	608	4	48	513.5	534	10	55.20
600	610	630	840	770	36/41	20	M33/M36	718	5	50	616.5	634	10	80.80
700	711	720	910	840	36/41	24	M33/M36	788	5	50	715	724	10	106.0
800	813	820	1025/1020	950	39/41	24	M36	898	5	52	817	824	10	130.5
900	914	920	1125/1120	1050	39/41	28	M36	998	5	44	918	924	10	91参考
1000	1016	1020	1255	1170	42/48	28	M39/M42	1110	5	46	1020	1024	10	127参考
1100		1120	1370	1280	42	28	M39	1222	5	50		1124	10	160参考
1200	1219	1220	1485	1390	48/54	32	M45/M48	1325	5	52	1223	1224	12	186参考
1300		1320	1585	1490	54	32	M48	1425	5	54		1324	12	215参考
1400	1422	1420	1685	1590	48/54	36	M48/M45	1525	5	58	1426	1424	14	245参考
1500		1520	1820	1710	54	36	M48	1640	5	60		1524	14	320参考
1600	1626	1620	1930	1820	55/58	40	M52	1750	5	64	1630	1624	16	360参考
1750			2080	1970	58	44	M52	1900	5	66			16	400参考
1800	1829	1820	2130	2020	55/58	44	M52	1950	5	68	1833	1824	17	430参考
2000	2032	2020	2345	2230	60	48	M56	2150	5	70	2036	2024	18	515参考

※系列1国家标准GB/T9119-2000/系列2机械行业标准JB/T81-94

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表4 PN2.5MPa ( 25压力 ) 板式平焊钢制管法兰 mm

公称 口径 DN	管子外径 A1		连接尺寸					密封面尺寸		法兰 厚度 C	法兰内径 B1		坡口 宽度 b	法兰理论 重量系列 Z kg
			法兰外径 系列1/系列2 D	螺栓孔 中心圆 直径K	螺栓孔直径 系列1/系列2 L	螺栓、螺柱					A	B		
	国际 A管	国内 B管				数量n	螺纹Th. 系列1/系列2	d	f					
10	17.2	14	90	60	14	4	M12	40	2	16	18	15	3	0.64
15	21.3	18	95	65	14	4	M12	45	2	16	22	19	3	0.80
20	26.9	25	105	75	14	4	M12	55	2	18	27.5	26	3	0.99
25	33.7	32	115	85	14	4	M12	65	2	18	34.5	33	4	1.18
32	42.4	38	140/135	100	18	4	M16	78	2	20	43.5	39	4	1.96
40	48.3	45	150/145	110	18	4	M16	85	3	22	49.5	46	4	2.60
50	60.3	57	165/160	125	18	4	M16	100	3	24	61.5	59	4	2.71
65	76.1	76	185/180	145	18	8	M16	120	3	24	77.5	78	5	3.22
80	88.9	89	200/195	160	18	8	M16	135	3	26	90.5	91	5	4.06
100	114.3	108	235/230	190	23	8	M20	160	3	28	116	110	5	6.00
125	139.7	133	270	220	26/25	8	M24/M22	188	3	30	141.5	135	5	8.26
150	168.3	159	300	250	26/25	8	M24/M22	218	3	30	170.5	161	5	10.40
175		194	330	280	26/25	12	M24/M22	248	3	32		196	6	11.90
200	219.1	219	360	310	26/25	12	M24/M22	278	3	32	221.5	222	7	14.50
225		245	395	340	30	12	M27	302	3	34		248	8	17.00
250	273	273	425	370	30	12	M27	332	3	34	276.5	276	9	18.90
300	323.9	325	485	430	30	16	M27	390	4	36	327.5	328	9	26.80
350	355.6	377	555/550	490	34	16	M30	448	4	42	359.5	380	10	34.35
400	406.4	426	620/610	550	36/34	16	M33/M30	505	4	44	411	430	10	44.90
450	457	480	670/660	600	36/34	20	M33/M30	555	4	48	462	484	10	51.92
500	508	530	730	660	36/41	20	M33/M36	610	4	52	513.5	534	10	67.30
600	610	630	845/840	770	41	20	M36	718	5	56	616.5	634	10	95.20
700	711	720	960/955	875	42/48	24	M39/M42	815	5	60	715	724	10	116
800	813	820	1085/1070	990	48	24	M45/M42	930	5	64	817	824	10	150.2
900	914	920	1185/1180	1090	48/54	28	M45/M48	1025	5	58	918	924	10	160参考
1000	1016	1020	1320/1305	1210	55/58	28	M52	1140	5	62	1020	1024	10	210参考
1100		1124	1425	1315	55	28	M52	1245	5	66		1124	10	260参考
1200	1219	1220	1530/1525	1420	55/58	32	M52	1350	5	70	1223	1224	12	300参考
1300		1320	1640	1530	65	32	M56	1450	5	74		1324	12	355参考
1400	1422	1420	1755/1750	1640	60/65	36	M56	1560	5	76	1426	1424	14	450参考
1500		1520	1865	1750	60	36	M56	1670	5	80		1524	14	530参考
1600	1626	1620	1975	1860	60	40	M56	1780	5	84	1630	1624	16	570参考
1800	1829	1820	2195	2070	68	44	M64	1985	5	90	1833	1824	17	700参考
2000	2032	2020	2425	2300	68	48	M64	2210	5	96	2036	2024	18	900参考

※系列1国家标准GB/T9119-2000/系列2机械行业标准JB/T81-94

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表5 PN4.0MPa (40压力) 凹凸面对焊钢制管法兰 mm

公称 口径 DN	管子外径 A1		连接尺寸					密封面尺寸					法兰颈						法兰理论 重量系列 2 kg		
	国际 A管	国内 B管	法兰外径 系列1/ 系列2 D	螺栓 孔中 心圆 直径 K	螺栓孔 直径 系列1/ 系列2 L	螺栓、螺柱		d	X凸面 系列1/ 系列2	Y凹面 系列1/ 系列2	f	f1 f2	法兰 厚度 C	法兰 内径 B	法兰 高度 H	颈部 直径 Nmax	法兰 焊端 壁厚 S	直边 段 H1	圆角 半径 R	A型	B型
						数量 n	螺纹Th. 系列1/ 系列2														
10	17.2	14	90	60	14	4	M12	40	34	35	2	4	16	8	35	26	2.3	6	3	0.77	0.67
15	21.3	18	95	65	14	4	M12	45	39	40	2	4	16	12	35	30	3.2	6	3	0.87	0.77
20	26.9	25	105	75	14	4	M12	55	50	51	2	4	16	18	36	38	3.2	6	4	1.09	0.97
25	33.7	32	115	85	14	4	M12	65	57	58	2	4	16	25	38	45	3.2	6	4	1.31	1.18
32	42.4	38	140/135	100	18	4	M16	78	65	66	2	4	18	31	45	56	3.6	6	5	2.17	1.98
40	48.3	45	150/145	110	18	4	M16	85	75	76	3	4	18	38	48	64	3.6	7	5	2.51	2.14
50	60.3	57	165/160	125	18	4	M16	100	87	88	3	4	20	48	48	76	4	8	5	3.34	2.92
65	76.1	76	185/180	145	18	4	M16	120	109	110	3	4	22	66	52	96	5	10	6	4.34	3.85
80	88.9	89	200/195	160	18	8	M16	135	120	121	3	4	24	78	58	112	5.6	12	6	5.52	5.03
100	114.3	108	235/230	190	23	8	M20	160	149	150	3	4.5	26	96	68	138	6.3	12	6	8.39	7.71
125	139.7	133	270	220	26/25	8	M24/M22	188	175	176	3	4.5	28	120	68	160	6.3	12	6	11.06	10.27
150	168.3	159	300	250	26/25	8	M24/M22	218	203	204	3	4.5	30	145	72	186	7.1	12	6	14.16	13.30
(175)		194	350	295	30	8	M27	258	233	234	3	4.5	36	177	88	226	7.1	12	6	21.80	20.97
200	219.1	219	375	320	30	12	M27	282	259	260	3	4.5	38	200	88	250	8	16	8	25.56	24.72
(225)		245	415	355	34	12	M30	315	286	287	3	4.5	40	226	98	280	8	16	8	32.48	31.60
250	273	273	450/445	385	34	12	M30	345	312	313	3	4.5	42	252	102	310	10	18	10	39.87	39.00
300	323.9	325	515/510	450	34	12	M30	408	363	364	4	4.5	46	301	116	368	10	18	10	55.97	53.21
350	355.6	377	580/570	510	36/34	16	M33/M30	465	421	422	4	5	52	351	120	418	11	20	10	75.30	72.29
400	406.4	426	660/655	585	41	16	M36	535	473	474	4	5	58	398	142	480	12.5	20	10	112.02	108.44
450	457	480	685/680	610	41	20	M36	560	523	524	4	5	60	448	146	530	14.2	20	12	112.82	109.70
500	508	530	755	670	42/48	20	M39/M42	612	575	576	4	5	62	495	156	580	16	20	12	142.70	138.60
600	610	630	890	795	48/54	20	M45/M48	730	675/677	676/678	5	6	62	595	176	700	17.5	20	20	167	160参考
700	711	720	995	900	48/54	24	M45/M48	835	777/767	778/768	5	6	68	680	200	780	19	20	20	275	265参考
800	813	820	1140/1135	1030	58	24	M52	960	882/875	883/876	5	6	76	780	220	910	20	20	22	410	400参考

※系列1国家标准GB/T9119-2000/系列2机械行业标准JB/T81-94

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表6 PN6.3MPa (64压力) 凹凸面对焊钢制管法兰 mm

公称 口径 DN	管子外径 A1		连接尺寸					密封面尺寸					法兰颈					法兰理论 重量系列 2 kg			
			法兰外径 系列1/ 系列2 D	螺栓 孔中 心圆 直径 K	螺栓孔 直径 系列1/ 系列2 L	螺栓、螺柱		d	X凸面 系列1/ 系列2	Y凹面 系列1/ 系列2	f	f1 f2	法兰 厚度 C	法兰 内径 B	法兰 高度 H	颈部 直径 Nmax	法兰 焊端 壁厚 S			直边 段 H1	圆角 半径 R
	数量 n	螺纹Th. 系列1/ 系列2				A型	B型														
10	17.2	14	100	70	14	4	M12	50	34	35	2	4	18	8	48	34	3	6	3	1.12	1.02
15	21.3	18	105	75	14	4	M12	55	39	40	2	4	18	12	48	38	3.2	6	3	1.25	1.14
20	26.9	25	130/125	90	18	4	M16	68	50	51	2	4	20	18	56	48	3.6	6	4	2.12	1.95
25	33.7	32	140/135	100	18	4	M16	78	57	58	2	4	22	25	58	52	3.6	8	4	2.64	2.46
32	42.4	38	155/150	110	23	4	M20	82	65	66	2	4	24	31	62	64	3.6	8	5	3.50	3.28
40	48.3	45	170/165	125	23	4	M20	95	75	76	3	4	24	37	68	74	4	10	5	4.35	3.91
50	60.3	57	180/175	135	23	4	M20	105	87	88	3	4	26	47	70	86	5	10	5	5.29	4.80
65	76.1	76	205/200	150	23	8	M20	130	109	110	3	4	28	64	75	106	6	12	6	7.00	6.43
80	88.9	89	215/210	170	23	8	M20	140	120	121	3	4	30	77	75	120	6	12	6	8.07	7.50
100	114.3	108	250	200	26/25	8	M24/M22	168	149	150	3	4.5	32	94	80	140	7	12	6	11.51	10.80
125	139.7	133	295	240	30	8	M27	202	175	176	3	4.5	36	118	98	172	7.5	12	6	18.02	17.09
150	168.3	159	345/340	280	34	8	M30	240	203	204	3	4.5	38	142	108	206	8.5	12	8	26.45	25.29
(175)		194	375/370	310	34	12	M30	270	233	234	3	4.5	42	174	110	232	8.5	12	8	30.63	29.61
200	219.1	219	415/405	345	36/34	12	M33/M30	300	259	260	3	4.5	44	198	116	264	10.5	16	8	39.63	38.51
(225)		245	430	370	36/34	12	M33/M30	325	286	287	3	4.5	46	222	120	290	10.5	16	8	43.34	42.32
250	273	273	470	400	36/41	12	M33/M36	352	312	313	3	4.5	48	246	122	316	13.5	18	10	53.64	52.47
300	323.9	325	530	460	36/41	16	M33/M36	412	363	364	4	4.5	54	294	136	370	15.5	18	10	73.10	69.97
350	355.6	377	600/595	525	41	16	M36	475	421	422	4	5	60	342	154	430	17.5	20	10	103.50	100.10
400	406.4	426	670	585	42/48	16	M39/M42	525	473	474	4	5	66	386	170	484	20	20	10	143.30	138.90
450	457	480	715	630	48	20	M42	570	523	524	4	5	70	440	186	540	22.5	22	15	160	155参考
500	508	530	800	705	48/54	20	M45	640	575	576	4	5	70	485	200	595	22.5	22	18	215	210参考
600	610	630	930	820	58	20	M52	750	675/677	676/678	5	6	76	585	220	710	25	22	18	320	310参考
700	711	720	1045	935	58	24	M52	865	777/767	778/768	5	6	84	670	240	800	25	24	18	450	435参考
800	813	820	1165	1050	62	24	M56	980	882/875	883/876	5	6	90	765	260	925	25	24	18	540	525参考


※系列1国家标准GB/T9119-2000/系列2机械行业标准JB/T81-94

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表7 PN10.0MPa (100压力) 凹凸面对焊钢制管法兰 mm

公称 通径 DN	管子外径 A1		连接尺寸					密封面尺寸					法兰颈					法兰理论 重量系列 2 kg			
	国际 A管	国内 B管	法兰外径 系列1/ 系列2 D	螺栓 孔中 心圆 直径 K	螺栓孔 直径 系列1/ 系列2 L	螺栓、螺柱		d	X凸面 系列1/ 系列2	Y凹面 系列1/ 系列2	f	f1 f2	法兰 厚度 C	法兰 内径 B	法兰 高度 H	颈部 直径 Nmax	法兰 焊端 壁厚 S	直边 段 H1	圆角 半径 R	A型	B型
						数量 n	螺纹Th. 系列1/ 系列2														
10	17.2	14	100	70	14	4	M12	50	34	35	2	4	18	8	45	34	3	6	3	1.12	1.01
15	21.3	18	105	75	14	4	M12	55	39	40	2	4	20	12	48	38	3.2	6	3	1.37	1.26
20	26.9	25	130/125	90	18	4	M16	68	50	51	2	4	22	18	56	48	3.6	6	4	2.30	2.13
25	33.7	32	140/125	100	18	4	M16	78	57	58	2	4	24	25	58	52	3.6	8	4	2.86	2.67
32	42.4	38	155/150	110	23	4	M20	82	65	66	2	4	24	31	62	64	3.6	8	5	3.50	3.28
40	48.3	45	170/165	125	23	4	M20	95	75	76	3	4	26	37	70	76	4	10	5	4.72	4.28
50	60.3	57	195	145	26/25	4	M24/M22	112	87	88	3	4	28	45	72	86	6	10	5	6.58	6.02
65	76.1	76	220	170	26/25	8	M24/M22	138	109	110	3	4	32	62	84	110	7	12	6	9.20	8.60
80	88.9	89	230	180	26/25	8	M24/M22	148	120	121	3	4	34	75	90	124	7	12	6	10.61	9.97
100	114.3	108	265	210	30	8	M27	172	149	150	3	4.5	38	92	100	146	8	12	6	15.54	14.70
125	139.7	133	315/310	250	34	8	M30	210	175	176	3	4.5	42	112	115	180	10.5	12	6	25.10	24.00
150	168.3	159	355/350	290	34	12	M30	250	203	204	3	4.5	46	136	130	214	11.5	12	8	34.43	33.26
(175)		194	385/380	320	34	12	M30	280	233	234	3	4.5	48	166	135	246	11.5	16	10	41.60	40.47
200	219.1	219	430	360	36/41	12	M33/M36	312	259	260	3	4.5	54	190	145	276	14.5	16	10	57.14	55.80
(225)		245	470	400	41	12	M36	352	286	287	3	4.5	56	212	165	312	14.5	16	10	73.30	71.90
250	273	273	505/500	430	41	12	M36	382	312	313	3	4.5	60	236	170	340	18.5	18	10	89.30	87.90
300	323.9	325	585	500	42/48	16	M39/M42	442	363	364	4	4.5	70	284	195	400	20.5	18	12	137.45	130.10
350	355.6	377	665	560	48/54	16	M45/M48	498	421	422	4	5	76	332	210	460	22.5	20	12	186.00	175.20
400	406.4	426	715	620	48/54	16	M45/M48	558	473	474	4	5	80	376	220	510	25	20	12	223.50	218.50
450	457	480	770	675	58	20	M52	615	523	524	4	5	84	430	235	570	25	20	18	280	270参考
500	508	530	870	760	58	20	M52	690	575	576	4	5	90	465	245	600	30	22	18	350	335参考
600	610	630	990	875	58	24	M52	800	675/677	676/678	5	6	95	570	265	700	30	22	18	460	445参考

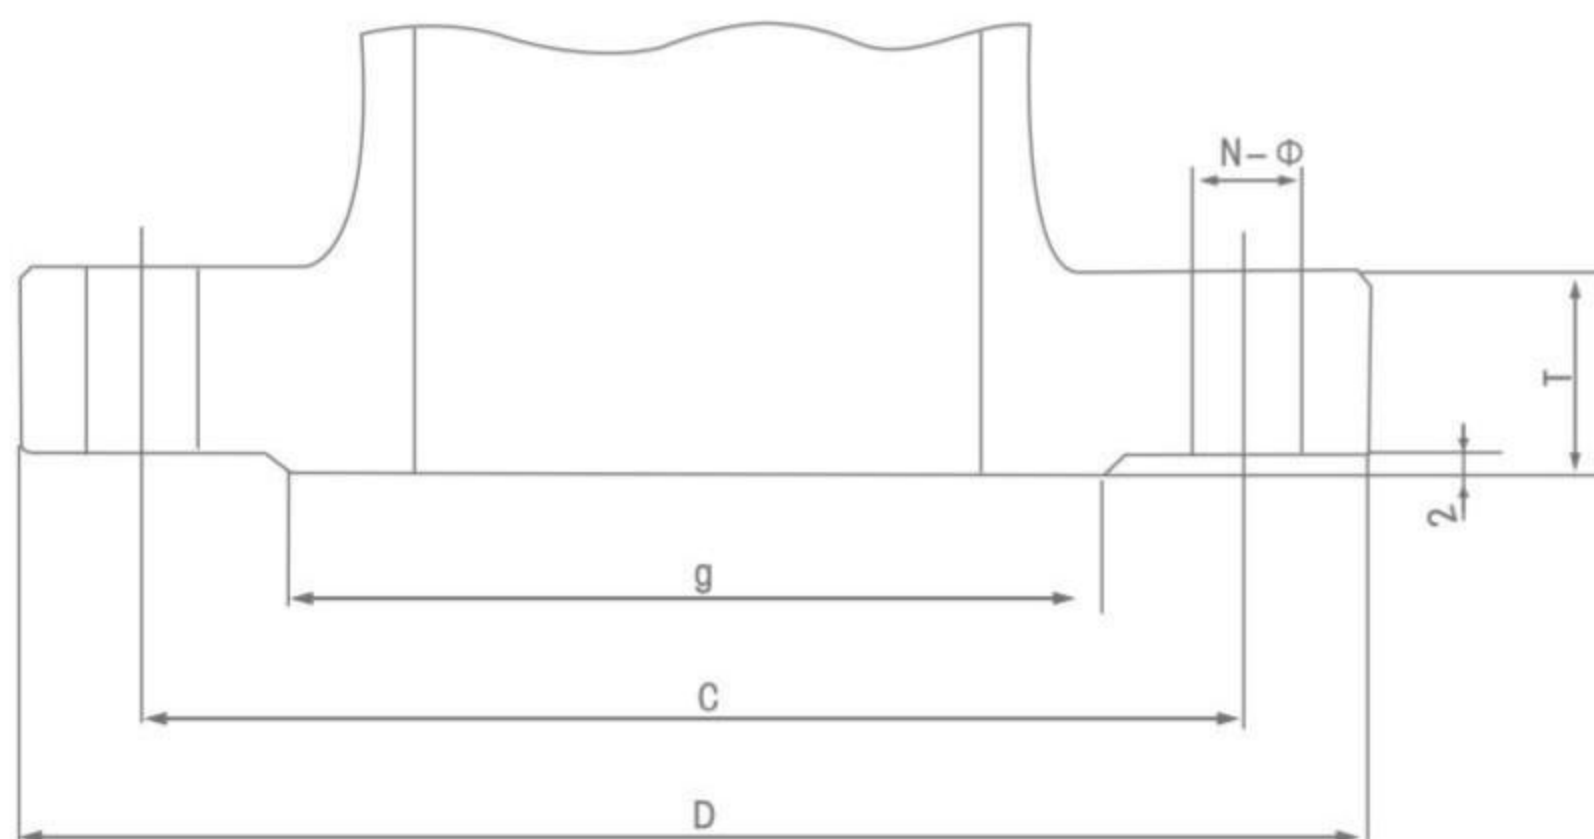

GB/T PN16 / PN40(RF)steel

※系列1国家标准GB/T9119-2000/系列2机械行业标准JB/T81-94

# FLANGE PARAMETER TABLE

## 法兰参数对照表

表8 PN2.0MPa ( Class 150 ) 美标带颈平焊钢制管法兰 mm

公称 通径		钢管 外径 A	连接尺寸					密封面尺寸		法兰 厚度 C	法兰 内径 B	法兰颈 N	法兰 高度 H	理论 重量 kg
NPS (in)	DN		法兰 外径 D	螺栓孔 中心圆 直径K	螺栓孔 直径 L	螺栓孔 数量n	螺纹 Th.	突面d	台高f1					
1/2	15	21.3	89	60.5	16	4	M14	35	1.6	11.5	22	30	16	0.41
3/4	20	26.9	98	70	16	4	M14	43	1.6	13	27.5	38	16	0.58
1	25	33.7	108	79.5	16	4	M14	51	1.6	14.5	34.5	49	17	0.80
1 1/4	32	42.4	117	89	16	4	M14	63.5	1.6	16	43.5	59	21	1.07
1 1/2	40	48.3	127	98.5	16	4	M14	73	1.6	17.5	49.5	65	22	1.37
2	50	60.3	152	120.5	18	4	M16	92	1.6	19.5	61.5	78	25	2.01
2 1/2	65	76.1	178	139.5	18	4	M16	105	1.6	22.5	77.5	90	29	3.32
3	80	88.9	190	152.5	18	4	M16	127	1.6	24	90.5	108	30	3.83
4	100	114.3	229	190.5	18	8	M16	157.5	1.6	24	116	135	33	5.40
5	125	139.7	254	216	22	8	M20	186	1.6	24	141.5	164	36	6.26
6	150	168.3	274	241.5	22	8	M20	216	1.6	25.5	170.5	192	40	7.50
8	200	219.1	343	298.5	22	8	M20	270	1.6	29	221.5	246	44	12.3
10	250	273	406	362	26	12	M24	324	1.6	30.5	276.5	305	49	16.2
12	300	323.9	483	432	26	12	M24	381	1.6	32	327.5	365	56	26.5
14	350	355.6	533	476	29.5	12	M27	413	1.6	35	359.5	400	57	34.5
16	400	406.4	597	540	29.5	16	M27	470	1.6	37	411	457	64	45.5
18	450	457	635	578	32.5	16	M30	533.5	1.6	40	462	505	68	48.5
20	500	508	698	635	32.5	20	M30	584	1.6	43	513.5	559	73	61.8
24	600	610	813	749.5	35.5	20	M33	692	1.6	48	616.5	664	83	87.7

表9 PN5.0MPa ( Class 300 ) 美标带颈平焊钢制管法兰 mm

公称 通径		钢管 外径 A	连接尺寸					密封面尺寸		法兰 厚度 C	法兰 内径 B	法兰颈 N	法兰 高度 H	理论 重量 kg
NPS (in)	DN		法兰 外径 D	螺栓孔 中心圆 直径K	螺栓孔 直径 L	螺栓孔 数量n	螺纹 Th.	突面d	台高f1					
1/2	15	21.3	89	66.5	16	4	M14	35	1.6	14.5	22	38	22	0.63
3/4	20	26.9	117	82.5	18	4	M16	43	1.6	16	27.5	48	25	1.16
1	25	33.7	124	89	18	4	M16	51	1.6	17.5	34.5	54	27	1.37
1 1/4	32	42.4	133	98.5	18	4	M16	63.5	1.6	19.5	43.5	64	27	
1 1/2	40	48.3	156	114.5	22	4	M20	73	1.6	21	49.5	70	30	
2	50	60.3	165	127	18	8	M16	92	1.6	22.5	61.5	84	33	
2 1/2	65	76.1	190	149	22	8	M20	105	1.6	25.5	77.5	100	38	
3	80	88.9	210	168.5	22	8	M20	127	1.6	29	90.5	118	43	
4	100	114.3	254	200	22	8	M20	157.5	1.6	32	116	146	48	
5	125	139.7	279	235	22	8	M20	186	1.6	35	141.5	178	51	
6	150	168.3	318	270	22	12	M20	216	1.6	37	170.5	206	52	
8	200	219.1	381	330	26	12	M24	270	1.6	41.5	221.5	260	62	
10	250	273	444	387.5	29.5	16	M27	324	1.6	48	276.5	321	67	
12	300	323.9	521	451	32.5	16	M30	381	1.6	51	327.5	375	73	
14	350	355.6	584	514.5	32.5	20	M30	413	1.6	54	359.5	426	76	
16	400	406.4	648	571.5	35.5	20	M33	470	1.6	57.5	411	483	83	
18	450	457	711	628.5	35.5	24	M33	533.5	1.6	60.5	462	533	89	
20	500	508	775	686	35.5	24	M33	584	1.6	63.5	513.5	587	95	
24	600	610	915	813	42	24	M39×3	692	1.6	70	616.5	702	104	


※系列1国家标准GB/T9119-2000/系列2机械行业标准JB/T81-94

# FLANGE PARAMETER TABLE


## 法兰参数对照表

表10 PN11.0MPa ( Class 600 ) 美标带颈平焊钢制管法兰 mm

公称通径		钢管外径 A	连接尺寸					密封面尺寸		法兰厚度 C	法兰内径 B	法兰颈 N	法兰高度 H	理论重量 kg
NPS (in)	DN		法兰 外径 D	螺栓孔 中心圆 直径K	螺栓孔 直径 L	螺栓孔 数量n	螺纹 Th.	突面d	台高f1					
1/2	15	21.3	95	66.5	16	4	M14	35	6.4	14.5	14	38	52	1.35
3/4	20	26.9	118	82.5	18	4	M16	43	6.4	16	18.5	48	57	1.59
1	25	33.7	124	89	18	4	M16	51	6.4	17.5	24.5	54	62	1.82
1 1/4	32	42.4	133	98.5	18	4	M16	63.5	6.4	21	32	64	67	2.50
1 1/2	40	48.3	156	114.5	22	4	M20	73	6.4	22.5	38	70	70	3.63
2	50	60.3	165	127	18	8	M16	92	6.4	25.5	49	84	73	4.54
2 1/2	65	76.1	190	149	22	8	M20	105	6.4	29	61.5	100	79	6.36
3	80	88.9	210	168.5	22	8	M20	127	6.4	32	72.5	117	83	8.17
4	100	114.3	273	216	26	8	M24	157.5	6.4	38.5	96.5	152	102	16.8
5	125	139.7	330	267	29.5	8	M27	186	6.4	44.5	119.5	189	114	30.9
6	150	168.3	356	292	29.5	12	M27	216	6.4	48	146	222	117	33.1
8	200	219.1	419	349	32.5	12	M30	270	6.4	55.5	187	273	133	50.9
10	250	273	508	432	35.5	16	M33	324	6.4	63.5	238	343	152	85.8
12	300	323.9	560	489	35.5	20	M33	381	6.4	67	279.5	400	156	102.6
14	350	355.6	605	527	39	20	M36×3	413	6.4	70	305.5	432	165	157.5
16	400	406.4	685	603	42	20	M39×3	470	6.4	76.5	350	495	178	218.4
18	450	457	745	654	45	20	M42×3	533.5	6.4	83	397	546	184	252.0
20	500	508	815	724	45	24	M42×3	584	6.4	89	444	610	190	313.3
22	550	559	870	778	48	24	M45×3	641	6.4	95	487	665	197	376.5
24	600	610	940	838	51	24	M48×3	692	6.4	102	530	718	203	443.6

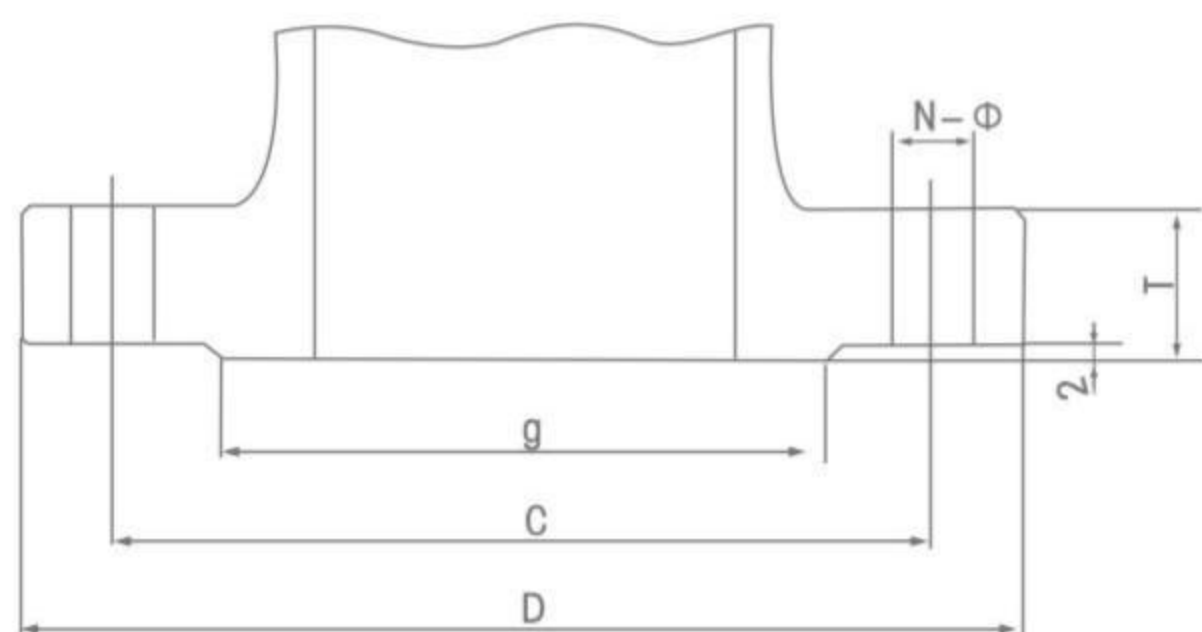

Class 150 / 300Lb (RF)Steel

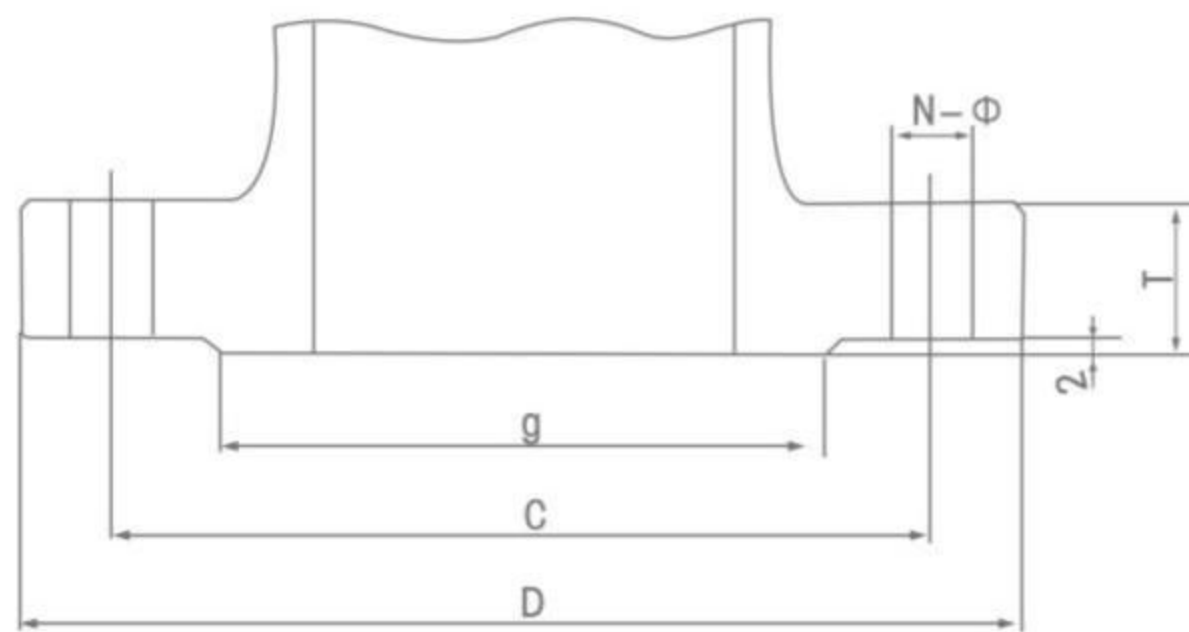

Class 600Lb (RF)Steel

# MATERIAL CHEMICAL COMPOSITION LIST

## 材质化学成分表

材质化学成分表 Material chemical composition list

ASTM	化学成份%											抗拉屈服				硬度	屈服强度
	C ≤	Mn ≤	P ≤	S ≤	Si ≤	Cr ≤	Mo ≤	Ni ≤	Cu ≤	V ≤	Nb ≤	收缩率 MPa, ≥	延伸率 MPa, ≥	收缩率 %, ≥	延伸率 %, ≥	布氏硬度 Hb, ≤	J, ≥
A105	0.35	0.60-1.05	0.035	0.040	0.10-0.35	0.30	0.12	0.4	0.40	0.08	0.02	485	250	30	30	187	
A182 F11	0.05-0.15	0.30-0.60	0.030	0.030	0.50-1.00	100-150	0.44-0.65					415	205	20	45	121-174	
A182 F22	0.05-0.15	0.30-0.60	0.040	0.040	0.5	200-250	0.87-1.13					415	205	20	35	170	
A182 F304	0.08	2.00	0.045	0.030	1.00	180-200		8.0-11.0				515	205	30	50		
A182 F304L	0.030	2.00	0.045	0.030	1.00	180-200		8.0-13.0				485	170	30	50		
A182 F316	0.08	2.00	0.045	0.030	1.00	160-180	2.00-3.00	10.0-14.0				515	205	30	50		
A182 F316L	0.030	2.00	0.045	0.030	1.00	160-180	2.00-3.00	10.0-15.0				485	170	30	50		
A182 F51	0.030	2.00	0.030	0.020	1.00	210-230	2.5-3.5	4.5-6.5				620	450	25	45		
A182 F6a	0.15	1.00	0.040	0.030	1.00	115-135		0.50				585	380	18	35	167-229	
A93 B7	0.37-0.49	0.65-1.10	0.035	0.040	0.15-0.35	0.75-1.20	0.15-0.25					860	720	16	50	321	
A193 B7M	0.37-0.49	0.65-1.10	0.035	0.040	0.15-0.35	0.75-1.20	0.15-0.25	8.0-11.0				690	550	18	50	235	
A193 B8	0.08	2.00	0.045	0.030	1.00	180-200		10.0-14.0		0.25-0.35		515	205	30	50	223	
193 B8M	0.08	2.00	0.045	0.030	1.00	160-180	2.00-3.00					515	205	30	50	223	
A193 B16	0.36-0.47	0.45-0.70	0.035	0.040	0.15-0.35	0.80-1.15	0.50-0.65					860	720	18	50	321	
A194 2H	≥0.40	1.00	0.040	0.050	0.04											248-352	
A194 2HM	≥0.40	1.00	0.040	0.050	0.04			8.0-11.0								159-237	
A194 8	0.08	2.00	0.045	0.030	1.00	180-200		10.0-14.0								126-300	
A194 BM	0.08	2.00	0.045	0.030	1.00	160-180	2.00-3.00									126-300	
A216 WCB	0.30	1.00	0.04	0.045	0.60	0.50	0.20	0.50	0.30	0.03		485-655	250	22	35		
A216 WCC	.025	1.20	0.04	0.045	0.60	0.50	0.2	0.50	0.30	0.03		485-655	275	22	35		
A217 C5	0.20	0.40-0.70	0.04	0.045	0.75	4.00-6.50	0.45-0.65	0.50	0.50			620-795	415	18	35		
A217 CA15	0.15	1.00	0.040	0.040	1.50	115-140	0.50	1.00				620-795	450	18	30		
A217 WC6	0.05-0.20	0.50-0.80	0.04	0.045	0.60	1.00-1.50	0.45-0.65	0.50	0.50			485-655	275	20	35		
A217 WC9	0.05-0.18	0.40-0.70	0.04	0.045	0.60	2.00-2.75	0.90-1.20		0.50			480	275	20	35		
A276 410	0.08-0.15	1.00	0.040	0.030	1.00	115-135							275	20	45		
A276 420	≥15	1.00	0.040	0.030	1.00	120-140						860				241	
A320 L7	0.38-0.048	0.75-1.00	0.035	0.040	0.15-0.35	0.80-1.10	0.15-0.25					690	725	16	50		Avg:27;min:20
A320 L7M	0.38-0.048	0.75-1.00	0.035	0.040	0.15-0.35	0.80-1.10	0.15-0.25					515-690	550	18	50	235	Avg:27;min:20
A336 F22	0.05-0.15	0.30-0.60	0.025	0.025	0.5	200-250	0.90-1.10					415-585	310	19	40		
A350 LF1	0.30	0.60-1.35	0.035	0.040	0.15-0.30	0.30	0.12	0.40	0.40	0.08	0.02	415-585	205	28	38		Avg:18;min:14
A350 LF2	0.30	0.60-1.35	0.035	0.040	0.15-0.30	0.30	0.12	0.40	0.40	0.08	0.02	485-655	250	30	30		Avg:20;min:16
A351 CF8	0.08	1.50	0.040	0.040	2.00	180-210	0.50	8.0-11.0				485	205	35.0			
A351 CF3	0.03	1.50	0.040	0.040	2.00	170-210	0.50	8.0-12.0				485	205	35.0			
A351 CF8M	0.08	1.50	0.040	0.040	1.50	180-210	2.00-3.00	9.0-12.0				485	205	30.0			
A351 CF3M	0.03	1.50	0.040	0.040	1.50	170-210	2.00-3.00	9.0-13.0				485	205	30.0			
A351 CF8C	0.08	1.50	0.040	0.040	2.00	180-210	0.50	9.0-12.0	3.0-4.0			485	205	30.0			
A351 CN7M	0.07	1.50	0.040	0.040	1.50	190-220	2.00-3.00	2.75-3.05				425	170	35			
A352 LC1	0.25	0.50-0.80	0.04	0.045	0.60		0.45-0.65					450-620	240	24	35		
A352 LC2	0.25	0.50-0.80	0.04	0.045	0.60			2.00-3.00				485-655	275	24	35		Avg:18;min:14
A352 LC3	0.15	0.50-0.80	0.04	0.045	0.60			3.00-4.00				485-655	275	24	35		Avg:20;min:16
A352 LCB	0.30	1.00	0.04	0.045	0.60	0.50	0.20	0.50	0.30	0.30		450-620	240	24	35		Avg:20;min:16
A352 LCC	.025	1.20	0.04	0.045	0.60	0.50	0.20	0.50		0.30		485-655	275	22	35	139-202	Avg:18;min:14
A439 D2	0.30	0.70-1.25	0.08		1.50-3.00	1.75-2.75		18.00-22.00				400	207	8.0			Avg:20;min:16